


### TECHNICAL INFORMATION

|                                |                      |
|--------------------------------|----------------------|
| <b>Range :</b>                 | Suction cup          |
| <b>Category :</b>              | Plates               |
| <b>Series :</b>                | VPC                  |
| <b>Height (in mm) :</b>        | 19.5                 |
| <b>Shape :</b>                 | Plate                |
| <b>Contact lip diameter :</b>  | 26.3 mm              |
| <b>inner barrel diameter :</b> | 7.9 mm               |
| <b>Number of bellows :</b>     | 0.5 Bellows          |
| <b>Horizontal force :</b>      | 22.11 N              |
| <b>Vertical force :</b>        | 11.07 N              |
| <b>Volume :</b>                | 0.82 cm <sup>3</sup> |
| <b>Mass :</b>                  | 3.60 g               |
| <b>Arrow :</b>                 | 3 mm                 |



### Variants:

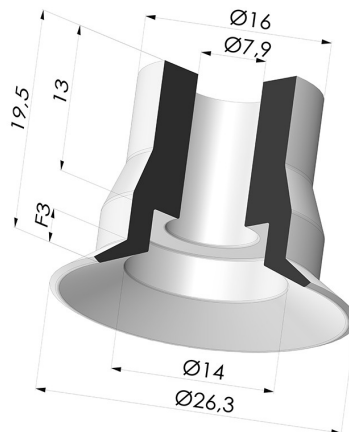

- Variant reference:  
**VPC 26SLT A**
- Color: Translucent
  - CE food certified
  - Matter: Silicone
  - Shore Hardness: SH60



- Variant reference:  
**VPC 26MNT A**
- Color: Bordeaux
  - Matter: Non-staining material for plastics processing
  - Shore Hardness: SH60



- Variant reference:  
**VPC 26NI A**
- Color: Black
  - Matter: Nitrile
  - Shore Hardness: SH50

### Material guide:

|  | Material                          | Code | Temperature resistance (°C) | Flexibility | Abrasion resistance | UV/Weather resistance | Oil resistance | Food compatibility | Migration test |
|--|-----------------------------------|------|-----------------------------|-------------|---------------------|-----------------------|----------------|--------------------|----------------|
|  | Silicone Translucent (Shore SH60) | SL T | -60/+250                    | ✓✓✓✓        | ✓                   | ✓✓✓✓                  | ✓              | FDA<br>**          | ✗              |
|  | Nitrile Black (Shore SH50)        | NI   | -10/+80                     | ✓           | ✓                   | ✗                     | ✓✓             | ✗                  | ✗              |

Requests for FDA and/or EC certificates must be made AT THE TIME OF ORDER. Any later request will incur additional charges. To meet the expectations of our industrial customers, NOVACOM offers the widest range of elastomer and thermoplastic materials. We can also develop new materials based on precise specifications, in order to solve specific applications for our customers.

✓✓✓✓ Excellent | ✓✓ Good | ✓ Low | ✗ Poor | ✗✗ Not recommended

\*FDA and/or EC certificate may be requested for various references at the time of order; please contact us.

\*\* Food contact certification: (EC) 1935/2004 - (FDA) 21 CFR 177.2600

\*\*\* Food contact certification: (EC) 10/2011 - (FDA) 21 CFR

## Related products:



### Separable Female Fitting G1/4"

Product reference: D



### Separable Male Fitting G1/4"

Product reference: E




### Adaptor - Female G1/4" - Female M6

Product reference: F14F6



### Adaptor - Female 1/8G - Female M6

Product reference: F18F6



### Separable Female Fitting G1/8"

Product reference: H




### Separable Male Fitting G1/8"

Product reference: I



### Crimped Female Fitting G1/4"

Product reference: L



### Crimped Male Fitting G1/4"

Product reference: M



### Adaptor - Male 1/4G - Female M6

Product reference: M14F6



### Adaptor - Male 1/8G - Female M6

Product reference: M18F6




### Screw M5 - Head Ø 14 mm - L 20.5 mm

Product reference: M5



### Screw M6 - Head Ø 14 mm - L 20.5 mm

Product reference: M6



### Crimped Female Fitting G1/8"

Product reference: R



### Crimped Male Fitting G1/8"

Product reference: S



### Screw M8 - Head Ø 14 mm - L 20 mm

Product reference: M8T14L20.5