


TECHNICAL INFORMATION

Range :	Suction cup
Category :	With bellows
Series :	96C
Height (in mm) :	41
Contact lip diameter :	35 mm
inner barrel diameter :	Male G1/4"
Number of bellows :	2.5 Bellows
Horizontal force :	39 N
Vertical force :	19.5 N
Arrow :	15 mm



Variants:

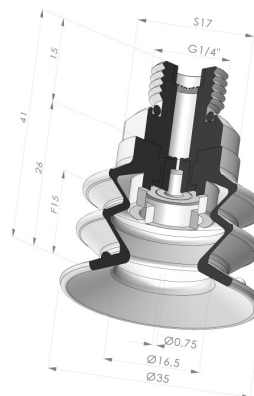

Variant reference:

96C 35PU 14D-2-GIC

- Color: Green / Yellow
- Matter: PU
- Shore Hardness: SH60 / SH30

Material guide:

	Material	Code	Temperature resistance (°C)	Flexibility	Abrasion resistance	UV/Weather resistance	Oil resistance	Food compatibility	Migration test
	PU Green / Yellow (Shore SH60 / SH30)	PU	-20/+80	✓	✓✓✓	✓✓	✓✓	✗	✗

Requests for FDA and/or EC certificates must be made AT THE TIME OF ORDER. Any later request will incur additional charges. To meet the expectations of our industrial customers, NOVACOM offers the widest range of elastomer and thermoplastic materials. We can also develop new materials based on precise specifications, in order to solve specific applications for our customers.



Excellent |



Good |



Low |



Poor |



Not recommended

*FDA and/or EC certificate may be requested for various references at the time of order; please contact us.

** Food contact certification: (EC) 1935/2004 - (FDA) 21 CFR 177.2600


*** Food contact certification: (EC) 10/2011 - (FDA) 21 CFR

Related products:



Separable Male Fitting 1/4G - with Spray Nozzle

Product reference: 9M14-2-GIC



Bellows Suction Cup 2.5 folds Series 96C, Ø 35 mm

Product reference: 96C 35-- A