



TECHNICAL INFORMATION

Range :	Suction cup
Category :	Oblong
Series :	4V
Height (in mm) :	22
Shape :	Oblong
Length :	45 mm
Width :	15 mm
inner barrel diameter :	11 mm
Number of bellows :	0.5 Bellows
Horizontal force :	27.81 N
Vertical force :	13.91 N
Volume :	1.4 cm ³
Mass :	5 g
Arrow :	2 mm

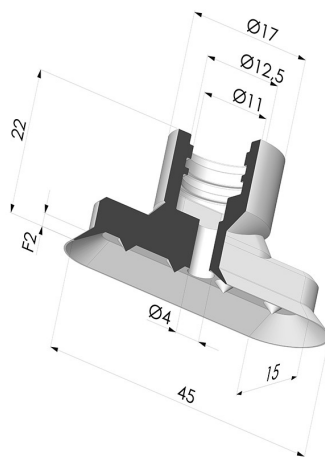

Variants:



Variant reference:

4V 45NI A

- Color: Black
- Matter: Nitrile
- Shore Hardness: SH70



Variant reference:

4V 45SLT A

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH60



Variant reference:

4V 45MNT A

- Color: Bordeaux
- Matter: Non-staining material for plastics processing
- Shore Hardness: SH60

Material guide:

	Material	Code	Temperature resistance (°C)	Flexibility	Abrasion resistance	UV/Weather resistance	Oil resistance	Food compatibility	Migration test
	Nitrile Black (Shore SH70)	NI	-10/+80	✓	✓	✗	✓✓	✗	✗
	Silicone Translucent (Shore SH60)	SL T	-60/+250	✓✓✓	✓	✓✓✓	✓	FDA  **	✗

Requests for FDA and/or EC certificates must be made AT THE TIME OF ORDER. Any later request will incur additional charges. To meet the expectations of our industrial customers, NOVACOM offers the widest range of elastomer and thermoplastic materials. We can also develop new materials based on precise specifications, in order to solve specific applications for our customers.



Excellent | Good | Low | Poor | Not recommended

*FDA and/or EC certificate may be requested for various references at the time of order; please contact us.

** Food contact certification: (EC) 1935/2004 - (FDA) 21 CFR 177.2600

*** Food contact certification: (EC) 10/2011 - (FDA) 21 CFR

Related products:



Separable Female Fitting 1/4G

Product reference: F14C



Separable Male Fitting G1/4"

Product reference: M14C



Clamp Ø 15-18 mm

Product reference: CO 1518



Separable Male Fitting G1/8"

Product reference: M18C

E-mail: info@novacom-grp.com

Z.A. de Sars et Rosières - 30, rue de l'épau - 59230 ROSULT - France

Phone. : +33 (0)3 27 30 53 53

VAT Number : FR57 381 120 484