


TECHNICAL INFORMATION

Range :	Suction cup
Category :	Plates
Series :	9
Height (in mm) :	17
Shape :	Plate
Contact lip diameter :	31.5 mm
inner barrel diameter :	M5
Number of bellows :	0.5 Bellows
Horizontal force :	32 N
Vertical force :	16 N
Arrow :	3.5 mm




Variants:

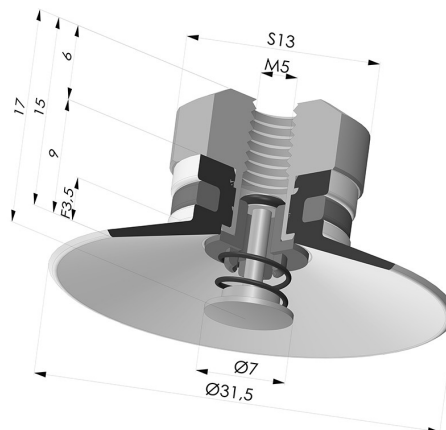

Variant reference:
9 30SL FM5PAL

- Color: Red food-grade CE certification
- Matter: Silicone
- Shore Hardness: SH60



Variant reference:
9 30SLT FM5PAL

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH60



Variant reference:
9 30NI FM5PAL

- Color: Black
- Matter: Nitrile
- Shore Hardness: SH50


Material guide:

	Material	Code	Temperature resistance (°C)	Flexibility	Abrasion resistance	UV/Weather resistance	Oil resistance	Food compatibility	Migration test
	Silicone Red food-grade CE certification (Shore SH60)	SL	-60/+250	✓✓✓✓	✗	✓✓✓✓	✗	FDA  **	A, B, D2
	Silicone Translucent (Shore SH60)	SL T	-60/+250	✓✓✓✓	✓	✓✓✓✓	✓	FDA  **	✗
	Nitrile Black (Shore SH50)	NI	-10/+80	✓	✓	✗	✓✓	✗	✗

Requests for FDA and/or EC certificates must be made AT THE TIME OF ORDER. Any later request will incur additional charges. To meet the expectations of our industrial customers, NOVACOM offers the widest range of elastomer and thermoplastic materials. We can also develop new materials based on precise specifications, in order to solve specific applications for our customers.

 Excellent |
  Good |
  Low |
  Poor |
  Not recommended
 *FDA and/or EC certificate may be requested for various references at the time of order; please contact us.
 ** Food contact certification: (EC) 1935/2004 - (FDA) 21 CFR 177.2600
 *** Food contact certification: (EC) 10/2011 - (FDA) 21 CFR

Related products:



Flat Suction Cup Series 9, Ø 30 mm

Product reference: 9 30-- A



Separable Female Fitting M5 - with Check Valve

Product reference: 9PM5-2-PAL

E-mail: info@nova.com-gip.com

Z.A. de Sars et Rosières - 30, rue de l'épau - 59230 ROSULT - France

Phone. : +33 (0)3 27 30 53 53

VAT Number : FR57 381 120 484