


TECHNICAL INFORMATION

Range :	Suction cup
Category :	With bellows
Series :	8
Height (in mm) :	74
Shape :	2.5 Bellows
Contact lip diameter :	34 mm
inner barrel diameter :	5mm
Number of bellows :	2.5 Bellows
Horizontal force :	36 N
Vertical force :	18 N
Arrow :	29 mm



Variants:

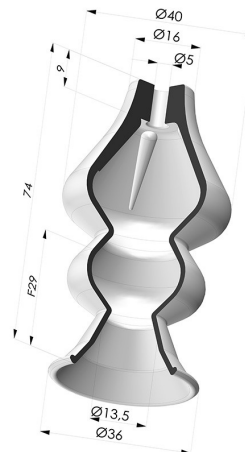

Variant reference:
8 34SLBLEU A SH30

- Color: Blue food-grade CE certification
- Matter: Silicone
- Shore Hardness: SH30



Variant reference:
8 34SL A

- Color: Red food-grade CE certification
- Matter: Silicone
- Shore Hardness: SH40



Variant reference:
8 34SL A SH60

- Color: Red food-grade CE certification
- Matter: Silicone
- Shore Hardness: SH60



Variant reference:
8 34SLT A

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH40

Material guide:

	Material	Code	Temperature resistance (°C)	Flexibility	Abrasion resistance	UV/Weather resistance	Oil resistance	Food compatibility	Migration test
	Silicone Blue food-grade CE certification (Shore SH30)	SLBLEU	-60/+250	✓✓✓	✗	✓✓✓	✗	FDA **	A, B, D2
	Silicone Red food-grade CE certification (Shore SH40)	SL	-60/+250	✓✓✓	✗	✓✓✓	✗	FDA **	✗
	Silicone Red food-grade CE certification (Shore SH60)	SL	-60/+250	✓✓✓	✗	✓✓✓	✗	FDA **	A, B, D2
	Silicone Translucent (Shore SH40)	SL T	-60/+250	✓✓✓	✓	✓✓✓	✓	FDA **	✗

Requests for FDA and/or EC certificates must be made AT THE TIME OF ORDER. Any later request will incur additional charges. To meet the expectations of our industrial customers, NOVACOM offers the widest range of elastomer and thermoplastic materials. We can also develop new materials based on precise specifications, in order to solve specific applications for our customers.

✓✓✓ Excellent | ✓✓ Good | ✓ Low | ✗ Poor | ✗✗ Not recommended

*FDA and/or EC certificate may be requested for various references at the time of order; please contact us.

** Food contact certification: (EC) 1935/2004 - (FDA) 21 CFR 177.2600

*** Food contact certification: (EC) 10/2011 - (FDA) 21 CFR

Related products:



Adaptor - Female 1/8G - Female M6

Product reference:
F18F6



Adaptor - Male 1/4G - Female M6

Product reference:
M14F6




Adaptor - Male 1/8G - Female M6

Product reference:
M18F6



Screw M6 - Head Ø 12 mm - L 23 mm

Product reference:
M6T12L23



Separable Male Fitting M6

Product reference:
M6C10L32