


TECHNICAL INFORMATION

Range :	Suction cup
Category :	With bellows
Series :	8
Height (in mm) :	19
Shape :	2.5 Bellows
Contact lip diameter :	13.5 mm
inner barrel diameter :	4 mm
Number of bellows :	2.5 Bellows
Diameter :	13.5mm
Horizontal force :	6N
Vertical force :	3N
Arrow :	9mm



Variants:

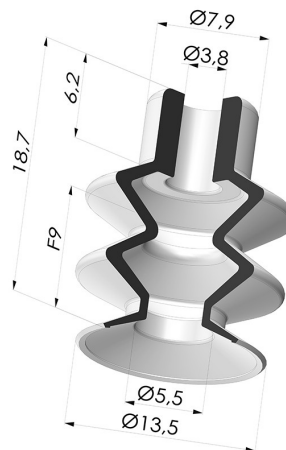

Variant reference:

8 14NI A

- Color: Black
- Matter: Nitrile
- Shore Hardness: SH50



Variant reference:

8 14SLT A

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH60



Variant reference:

8 14SL A SH40

- Color: Brick red
- CE food certified
- Matter: Silicone
- Shore Hardness: SH40



Variant reference:

8 14SLDB A

- Color: Blue food-grade CE certification
- Matter: Detectable silicone
- Shore Hardness: SH40



Variant reference:

8 14SLBLEU A SH30

- Color: Blue food-grade CE certification
- Matter: Silicone
- Shore Hardness: SH30



Variant reference:

8 14SLT A SH40

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH40



Variant reference:

8 14CN A

- Color: Brown FDA food certified
- Matter: Natural rubber
- Shore Hardness: SH35

Material guide:

	Material	Code	Temperature resistance (°C)	Flexibility	Abrasion resistance	UV/Weather resistance	Oil resistance	Food compatibility	Migration test
	Nitrile Black (Shore SH50)	NI	-10/+80	✓	✓	✗	✓✓	✗	✗
	Silicone Translucent (Shore SH60)	SL T	-60/+250	✓✓✓	✓	✓✓✓	✓	FDA **	✗
	Detectable silicone Blue food-grade CE certification (Shore SH40)	SLDB	-60/+250	✓✓✓	✗	✓✓✓	✗	FDA **	A, B, D2
	Silicone Blue food-grade CE certification (Shore SH30)	SLBLEU	-60/+250	✓✓✓	✗	✓✓✓	✗	FDA **	A, B, D2

	Silicone Translucent (Shore SH40)	SL T	-60/+250					**	
	Natural rubber Brown FDA food certified (Shore SH35)	CN	-20/+70					**	

Requests for FDA and/or EC certificates must be made AT THE TIME OF ORDER. Any later request will incur additional charges. To meet the expectations of our industrial customers, NOVACOM offers the widest range of elastomer and thermoplastic materials. We can also develop new materials based on precise specifications, in order to solve specific applications for our customers.

Excellent |

 Good |

 Low |

 Poor |

 Not recommended

*FDA and/or EC certificate may be requested for various references at the time of order; please contact us.

** Food contact certification: (EC) 1935/2004 - (FDA) 21 CFR 177.2600

*** Food contact certification: (EC) 10/2011 - (FDA) 21 CFR

Related products:



Separable Male Fitting M5
 Product reference: M5C10